



ST-BC SERIES STAINLESS STEEL FILTER HOUSINGS

- Heavy duty units for large scale commercial/industrial applications
- Brushed 304 stainless steel construction with a gray-silver epoxy finish
- Ideal for high-temperature applications
- Accepts complete range of standard double open end (DOE) cartridges



ST-BC Series stainless steel filter housings offer a variety of solutions for your large-scale, heavy-duty filtration needs. Simple to install and maintain, these housings are ideal for schools, restaurants, farms, institutions and industrial use. Holding from 4 to 20 cartridges, ST-BC Series housings provide flow rates from 28 – 125 gpm (106-473 L/min).

Housings are constructed of 304 stainless steel with a gray-silver epoxy finish. They include drains on both the “clean” and “dirty” sides of the sump.


ST-BC Series housings are compatible with a complete range of filter cartridges adding to their versatility.



Pure Quality.™

ST-BC SERIES

Stainless Steel Filter Housings

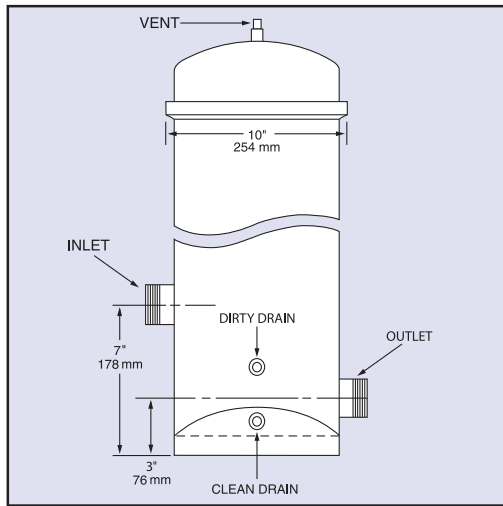

Housing Specifications and Performance Data

Model	Recommended* Flow Rates	Dimensions Height x O.A. Dia	Cartridges (max.)			Pipe Size (NPT)
			No.**	Dia.	Length	
ST-BC-4	28 gpm (106 L/min)	19-1/4" x 10" (489 mm x 254 mm)	4 x 1	3" (76mm)	9-3/4" or 10" (248mm or 254 mm)	2" (50.8 mm)
ST-BC-8	56 gpm (212 L/min)	29" x 10" (737 mm x 254 mm)	4 x 2	3" (76mm)	9-3/4" or 10" (248mm or 254 mm)	2" (50.8 mm)
ST-BC-12	84 gpm (318 L/min)	39-3/4" x 10" (1010 mm x 254 mm)	4 x 3	3" (76mm)	9-3/4" or 10" (248mm or 254 mm)	2" (50.8 mm)
ST-BC-16	110 gpm (416 L/min)	49-3/4" x 10" (1264 mm x 254 mm)	4 x 4	3" (76mm)	9-3/4" or 10" (248mm or 254 mm)	2" (50.8 mm)
ST-BC-20	125 gpm (473 L/min)	49-3/4" x 10" (1264 mm x 254 mm)	5 x 4	2-1/2" (64mm)	9-3/4" or 10" (248mm or 254 mm)	2" (50.8 mm)

NOTE: Will not accept model GAC, CC, CGAC, TSGAC, WS, PCF or PCC series cartridges.

Materials of Construction

- **Housing** Brushed 304 Stainless Steel
- **Finish** Epoxy
- **Maximum Temperature** 300°F (149°C)
- **Maximum Pressure** 125 psi (8.62 bar)
- **Pipe Size** 2" (50.8 mm)
- **Sealing Gasket** Buna-N

* Based on sediment removal with a 25-micron filter cartridge and 1 PSIG initial clean pressure drop.

** Number of cartridges refers to the number of 9-3/4" (248 mm) or 10" (254 mm) cartridges which are configured around the housing times the number of cartridges that may be stacked. Example 4 x 2 means that 9-3/4" (248 mm) cartridges are configured four around and two high.

NOTE: Maximum cartridge diameter 3" (76 mm).

WARNING: If pressure exceeds 125 psi (8.62 bar) at any time, a pressure regulator must be used. Do not use water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CAUTION: Protect against freezing to prevent cracking of the filter and water leakage.

NOTE: Not recommended for applications with TDS or chlorides >1000 ppm and/or pH <5.0. Use of this product in these conditions will void the limited warranty. Consult factory for product modifications for these conditions.



502 Indiana Avenue • P.O. Box 1047 • Sheboygan, Wisconsin 53082-1047

Customer Service: 800-645-0267 • Fax: 888-203-7361 • supportspecialist@pentekfiltration.com
International: 920-457-9435 • Fax: 920-457-2417 • international@pentekfiltration.com

www.pentekfiltration.com

